


# <XPND

ADJUSTABLE DAISY CHAIN



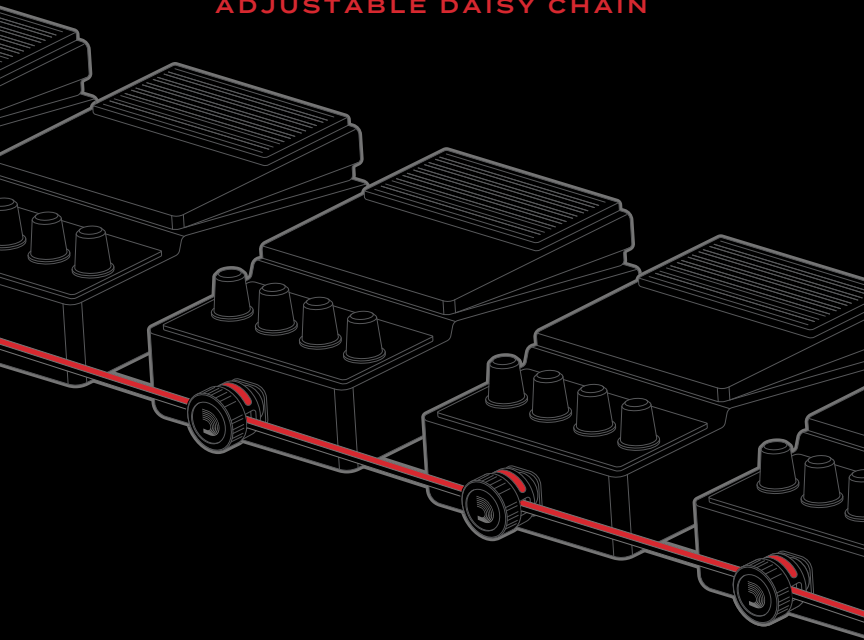

**\*Please Note** – Polarity is very important, please read and follow instructions carefully!

Match the color code on the wire and plug body to make proper connections with the standard 5.5mm jack polarity used on the effects pedals.

For effects pedals the center pin (tip) is negative (ground) and the outer barrel (sleeve) is positive (hot). There are rare instances where a pedal has reversed polarity, but it is very uncommon.

Also be careful not to plug just any power supply with a 5.5 mm barrel jack into your pedal board.

Connecting a tip positive power supply to your system could cause permanent damage to your effects pedals.

Do not exceed milliamp draw of power supply connected to Daisy Chain.

## INCLUDED PARTS



CAP (8)



INSERT (8)



PLUG (8)



WIRE (1)


## CONSIDERATIONS

- The Adjustable Daisy Chain is ready to use out of the box. You can move a plug anywhere you want, at any time to optimize it's configuration for your specific needs. The wire insulation will close up and 'heal,' so you can clean up your wiring scheme as-needed.
- When modifying placement of plugs, you may find it convenient to insert the plug bodies into the pedal power jack and run your wire to them while they remain inserted in your pedals.



PLEASE NOTE – Polarity is very important, read and follow instructions carefully!

## PASS-THROUGH CONFIGURATION

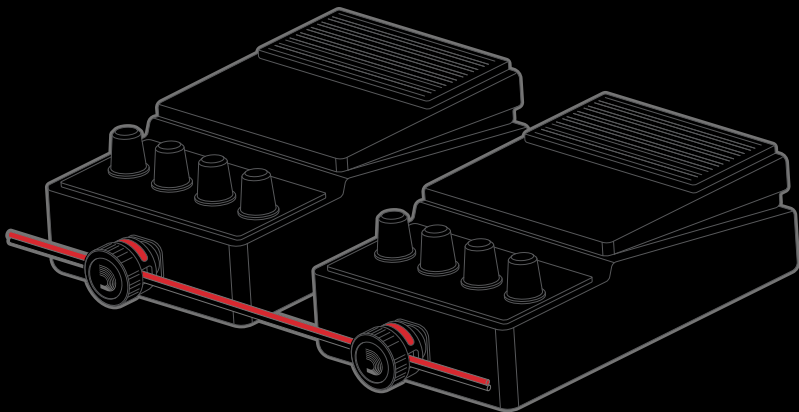


This configuration is ideal for scenarios in which consecutive pedals' power inputs are located at the top of the pedal.

1




Assemble the pass-through insert by pushing insert into the cap of the plug.

2



Insert the cable into the plug body.  
Be careful to line up the red wire with the red indicator on the plug.

3




Screw the cap down clockwise until fully tightened and flush with the plug body.

4




Ensure the red wire is aligned with the red indicators on the plug body and that the cap has not been cross-threaded.

## FOLD-OVER CONFIGURATION

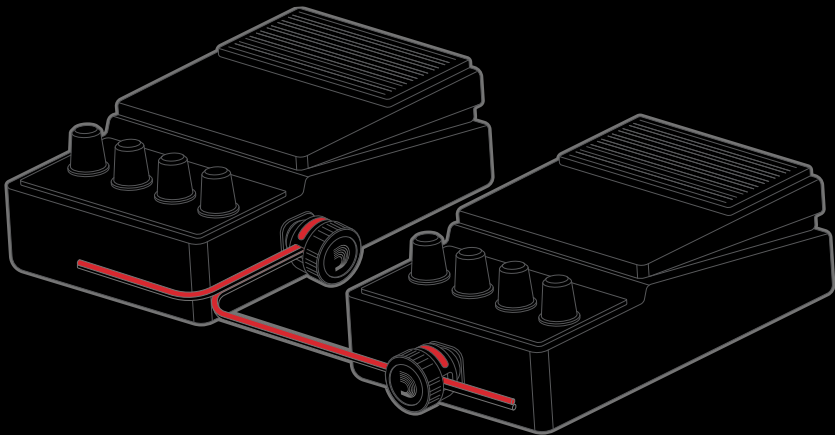


This configuration is ideal for scenarios where a pedal's power input is located on its side or for neatly ending a daisy chain.

1




Remove the pass-through insert from the plug cap.

2



Pass the wire through the body of the plug. Fold the wire over on top of itself, keeping the red wire aligned.

3



Screw the cap down clockwise until it is fully tightened and flush with the plug body.

4



Continue running wire to the next pedal or isolator, or snip remaining wire to neatly end the daisy chain.